

FIG. 1

FIG. 2 is a schematic diagram of a device 100 in a first state. The device 100 includes a first member 21 and a second member 23. The first member 21 is a long, thin, flexible member. The second member 23 is a shorter, thicker member. The first member 21 is connected to the second member 23 at a joint 27. The joint 27 is a hinge joint. The first member 21 is shown in a curved position, and the second member 23 is shown in a straight position. A third member 50 is shown as a curved line, possibly representing a spring or a cable, connected to the first member 21 and the second member 23. The device 100 is shown in a first state, and the first member 21 is shown in a curved position.

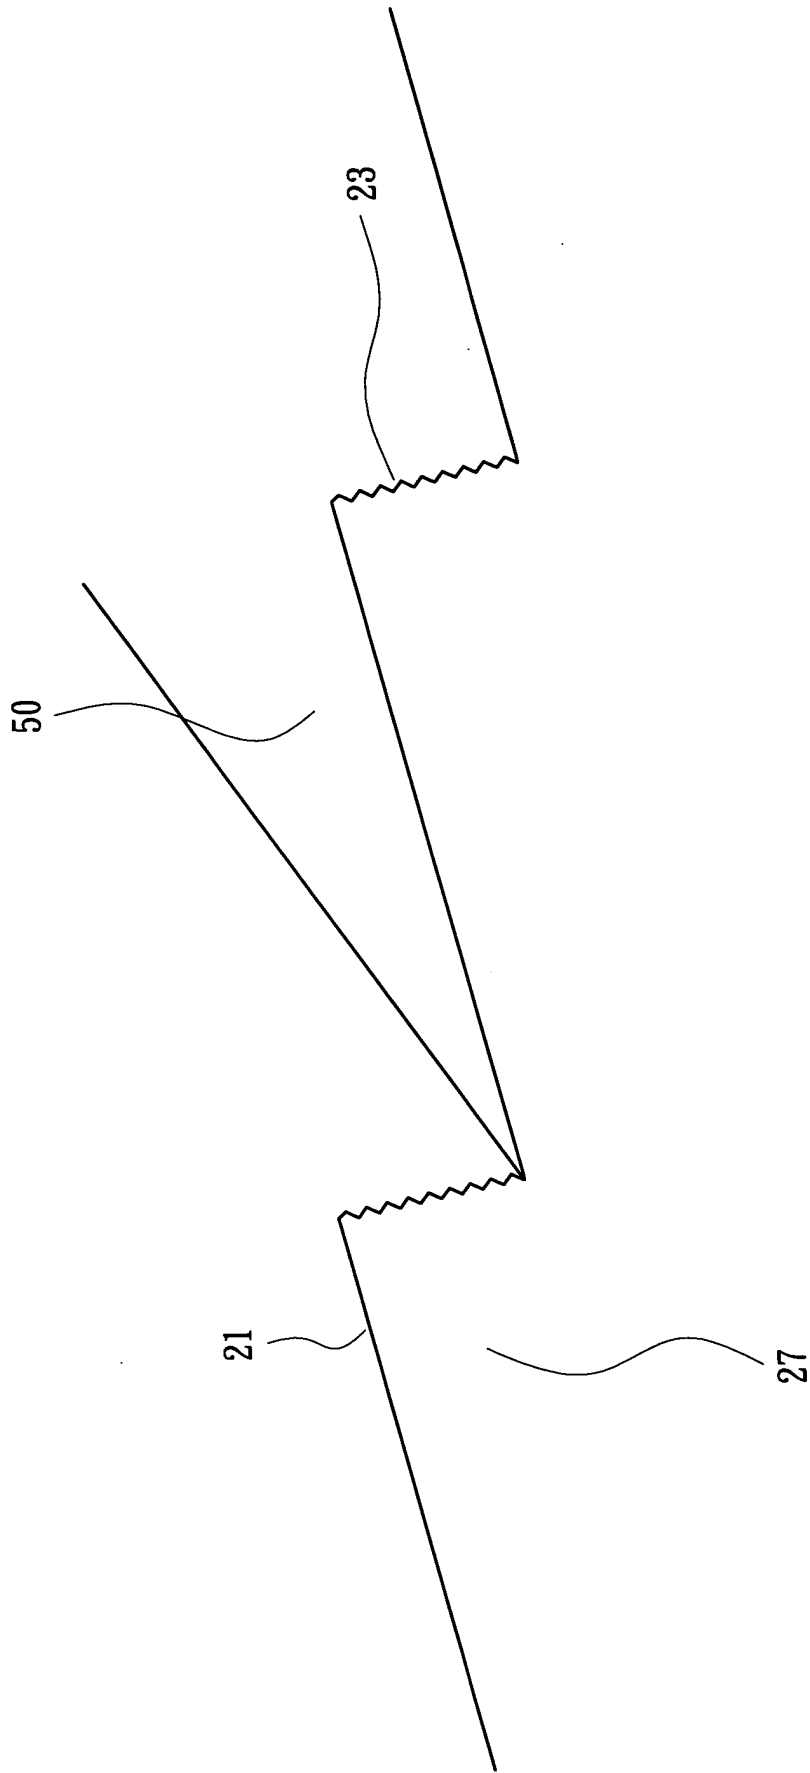


FIG. 2

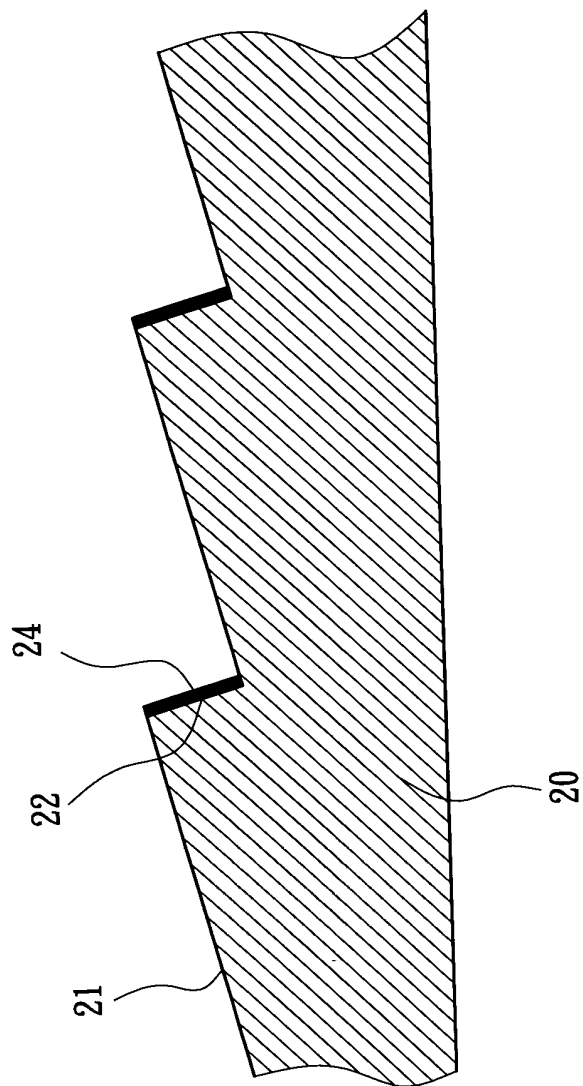


FIG. 3

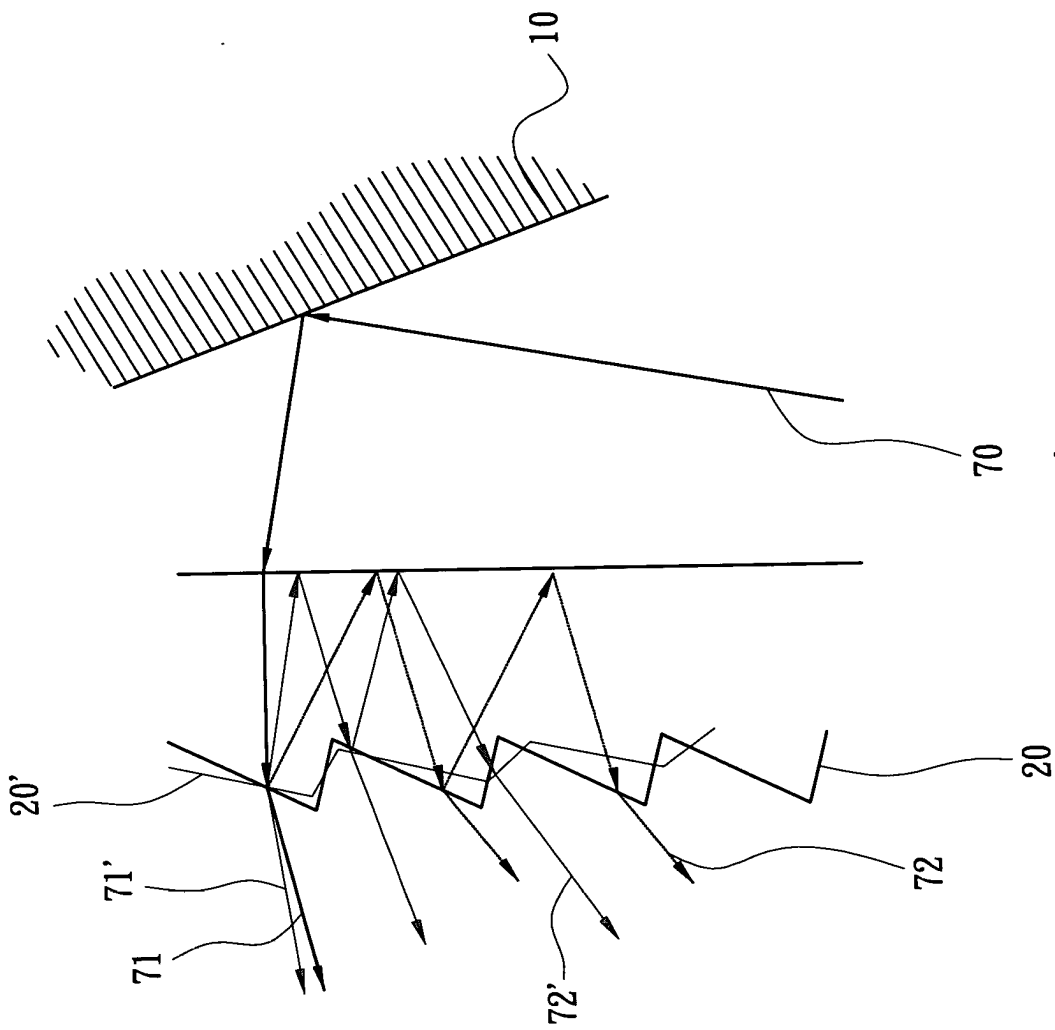


FIG. 4

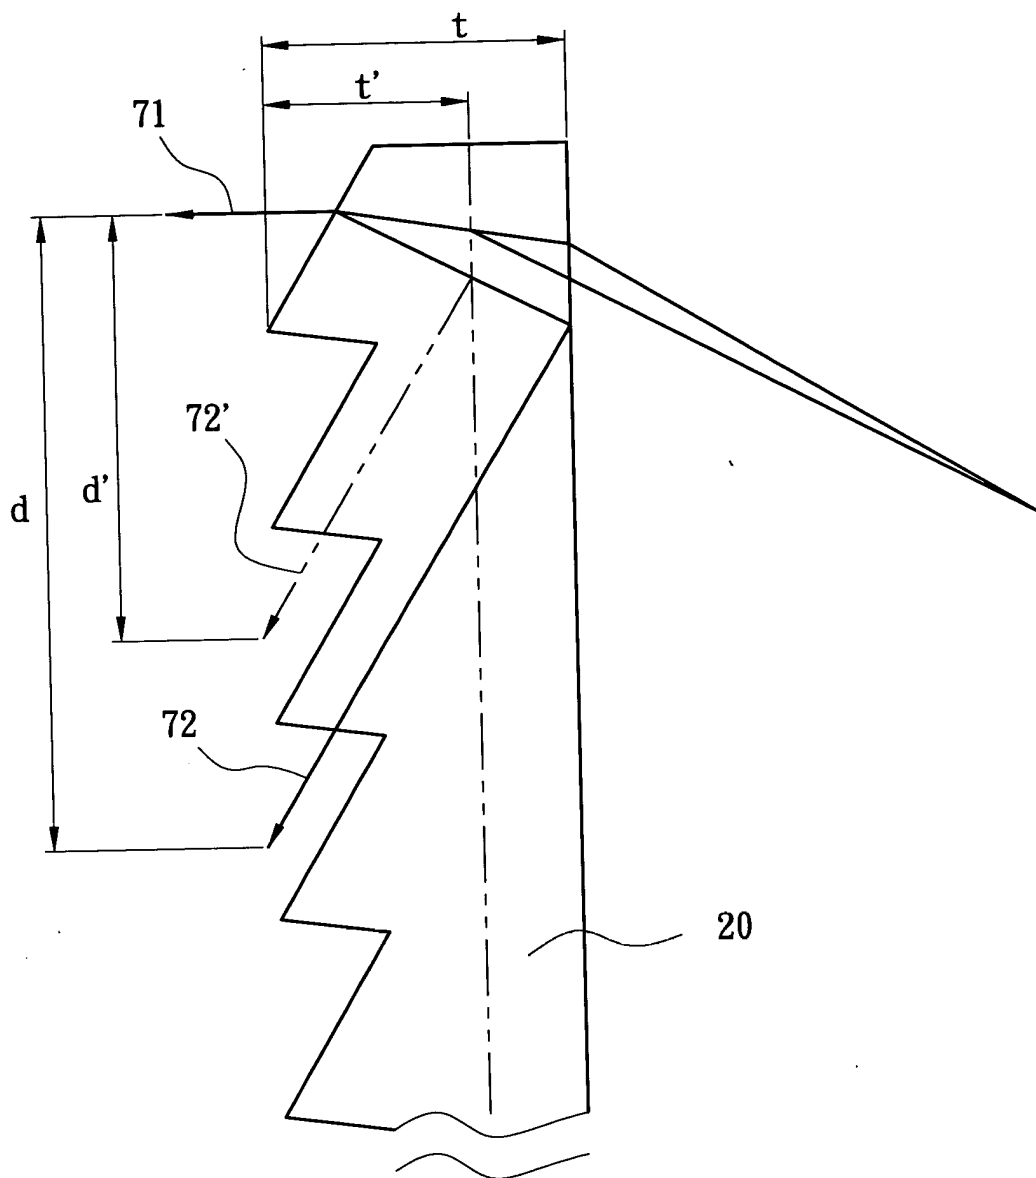


FIG. 5

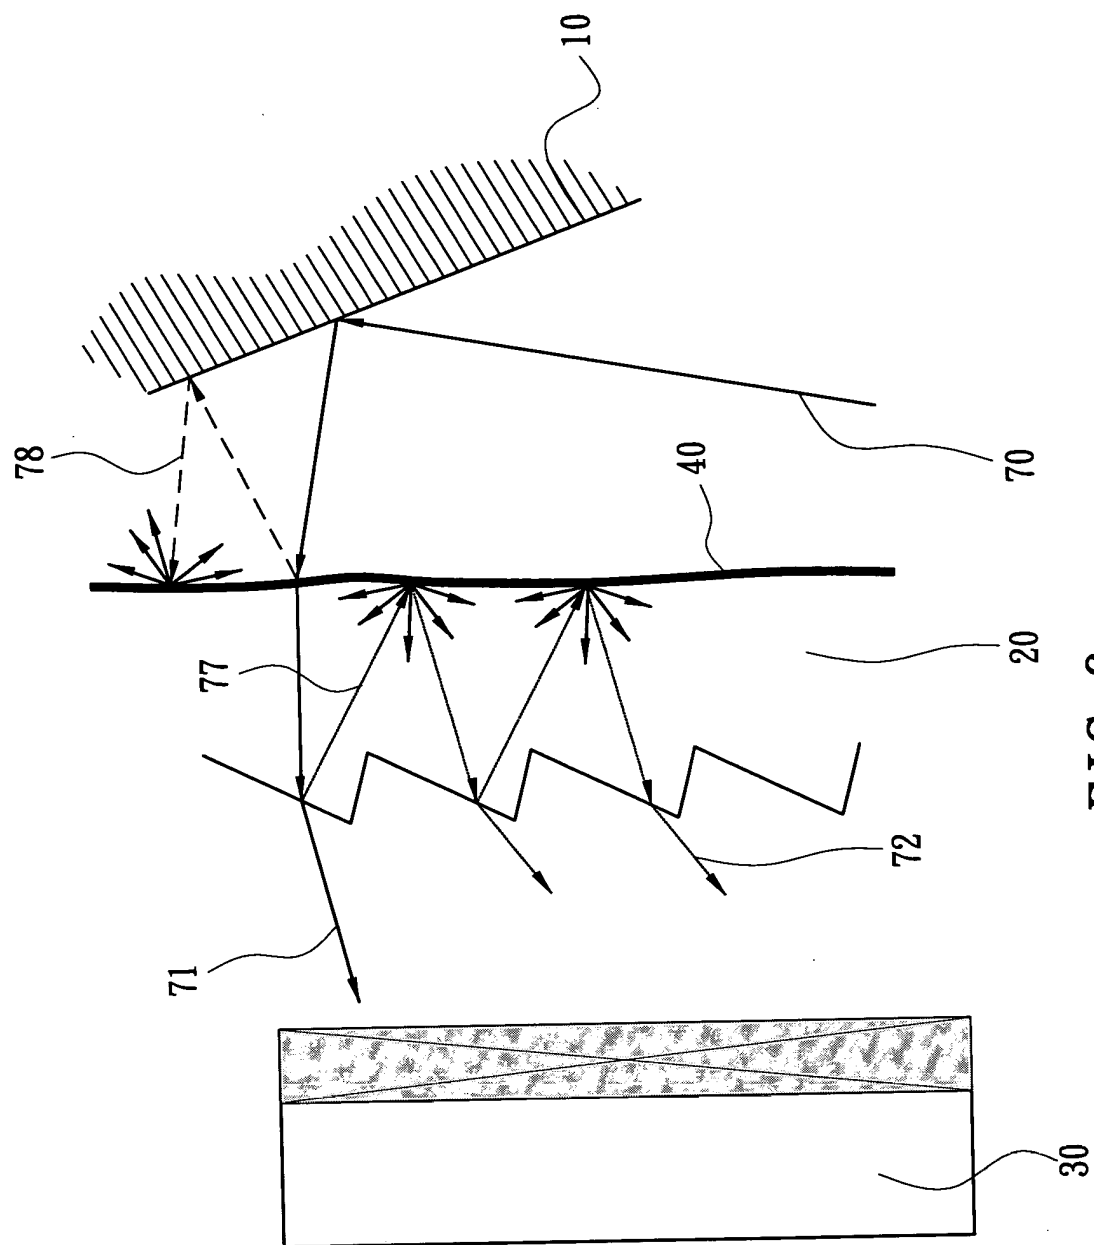


FIG. 6